

## **LPF SERIES**

- · Provides Static Pressure Equalization
- · Ergonomic Design
- · Compatible With Differential Pressure Transducers
- Easy Installation
- · Optional bulged tubulation for easy attachment


The Kulite Low-Pass Mechanical Filter (LPF) is designed to provide effective static-pressure equalization for any miniature differential pressure transducer. The LPF eliminates signal corruption in the audio frequency regime by attenuating the transmission of acoustic pressure waves to the differential transducer via the reference tube. The LPF is particularly valuable in providing effective static-pressure equalization for acoustic

2



measurements and dynamic pressure measurements in which the reference tube is also exposed the measurand. The compact LPF design enables the device to be easily attached via soft, elastic tubing to the reference tube of a differential pressure transducer. In-situ static pressure calibration can easily be conducted through the LPF. The LPF can quickly be removed to reuse the transducer for a different test application.

SPECIFICATIONS	LPF-1	LPF-1-040B or LPF-1-062B
Frequency Response of LPF	DC to 10 Hz (-3dB) Typ. (Low Pass Filter)	
Transducer Frequency Response with Installed LPF	10 Hz (-3dB) Typ. to >10 kHz*	
Transducer Phase Distortion with Installed LPF	<2° from 100 Hz to >10 kHz*	
Operating Temperature Range	-65°F to +932°F (-55°C to +500°C)	-65°F to +525°F (-55°C to +290°C)
Media	Gaseous Media Only	

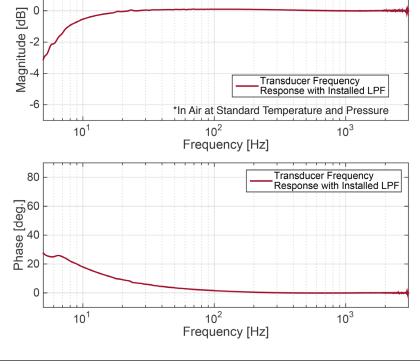

<sup>\*</sup> Upper Frequency Transducer Specific

See next page for additional P/N options.

